

030 969 MAT.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
WO 02/073304 A2

(51) International Patent Classification<sup>7</sup>: G02F 1/167

(74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau  
B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/IB02/00611

(81) Designated States (*national*): CN, JP, KR.

(22) International Filing Date: 28 February 2002 (28.02.2002)

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(25) Filing Language: English

(26) Publication Language: English

**Published:**

— without international search report and to be republished  
upon receipt of that report


(30) Priority Data:  
01200952.8 14 March 2001 (14.03.2001) EP

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors: JOHNSON, Mark, T.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). DE BOER, Dirk, K., G.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(54) Title: ELECTROPHORETIC DISPLAY DEVICE

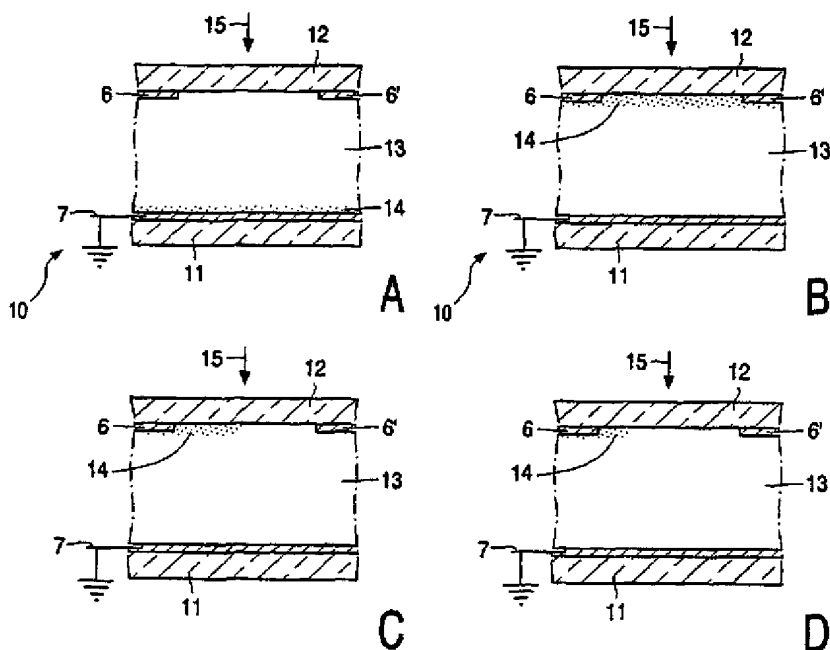

(57) Abstract: In electrophoretic displays, grey values are realized by introducing a further electrode (6') in addition to the conventional electrodes (6, 7) for bistable operation.

WO 02/073304 A2

## Electrophoretic display device

The invention relates to an electrophoretic display device comprising at least one pixel with an electrophoretic medium, and two switching electrodes, as well as drive means via which the pixel can be brought to different optical states. Where a switching electrode is mentioned in this application, it may be divided, if desired, into a plurality of sub-electrodes which are supplied with one and the same voltage either externally or via switching elements.

Electrophoretic display devices are based on the motion of charged, usually colored particles under the influence of an electric field between two extreme states having a different transmissivity or reflectivity. With these display devices, dark (colored) characters can be imaged on a light (colored) background, and vice versa.

Electrophoretic display devices are therefore notably used in display devices taking over the function of paper, referred to as the "white paper" applications (electronic newspapers, electronic diaries).

In the known electrophoretic display devices with an electrophoretic medium between two switching electrodes, the switching electrodes are supplied with drive voltages. The pixel may then be brought exclusively to two extreme optical states. One of the switching electrodes is then realized, for example, as two mutually interconnected narrow conducting strips on the upper side of a display element. At a positive voltage across this switching electrode with respect to a bottom electrode covering the entire bottom surface of the display element, charged particles (negatively charged in this example) move to the potential plane which is defined by the two interconnected narrow conducting strips. The (negatively) charged particles spread across the front face of the display element (pixel) which then assumes the color of the charged particles. At a negative voltage across the switching electrode with respect to the bottom electrode, the (negatively) charged particles spread across the bottom face so that the display element (pixel) assumes the color of the liquid.

In practice, there is an ever increasing need for displaying intermediate optical states (referred to as grey values). Known methods of introducing grey values are usually not

satisfactory. For example, electrophoretic display devices are too slow to introduce grey values via time-weighted drive periods (time ratio grey scale). Division of the pixel into different surfaces (area ratio grey scale) usually requires barriers between the different sub-pixels so as to prevent mutual crosstalk.

5                   It is an object of the present invention to meet this drawback. In an electrophoretic display device according to the invention, grey values (intermediate optical states) are introduced by providing the pixel with at least one further electrode and drive means for supplying the further electrode with electric voltages.

10                   The invention is based on the recognition that the electric field within a display cell can be influenced by means of electric voltages on the further electrode in such a way that, in the example described above, the electric field lines at a positive voltage across the switching electrode with respect to the bottom electrode are disturbed in such a way that the negatively charged particles move towards a portion of the surface between the two electrodes. Dependent on the electric voltages across the switching electrodes and one (or  
15                   more) further electrode(s), more or fewer particles move towards the surface between the two electrodes and different intermediate optical states (grey values) are obtained.

20                   To obtain a satisfactory distribution across the surface between the two electrodes when the settings are changed, it is preferred to spread the charged particles uniformly across the other electrode in advance, for example, by bringing the pixel to a defined state prior to selection, for example, by giving a reset pulse, if necessary in combination with a small alternating field component.

25                   In a first embodiment, the electrophoretic medium is present between two substrates, each of which is provided with a switching electrode, while at least one of the substrates is provided with the further electrode. The charged particles may then be present in a liquid between the substrates, but it is alternatively possible that the electrophoretic medium is present in a microcapsule. In the first-mentioned case, the pixels may be mutually separated by a barrier.

30                   In a further embodiment, the electrophoretic medium is present between two substrates, one of the substrates comprising the switching electrodes and the further electrode, notably when use is made of a lateral effect as described in "Development of In-Plane EPD", SID 2000 Digest, pp. 24-27.

                  In a preferred embodiment, the switching electrodes are comb-shaped and interdigital, and parts of the (insulated) further electrode are situated between the teeth of the two switching electrodes. Alternatively, the electrophoretic medium may be present in a

prismatic structure as described in "New Reflective Display Based on Total Internal Reflection in Prismatic Microstructures", Proc. 20<sup>th</sup> IDRC conference, pp. 311-314 (2000).

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

5

In the drawings:

Fig. 1 shows diagrammatically a display device,

Fig. 2 shows a pixel of an electrophoretic display device according to the invention, in which different grey values (intermediate optical states) have been realized,

Fig. 3 shows the electric field variation in pixels of an electrophoretic display device according to the invention, for elucidating the invention,

Fig. 4 shows another electrophoretic display device according to the invention, in which different grey values (intermediate optical states) have been realized,

Fig. 5 is a plan view of a part of another electrophoretic display device according to the invention,

Fig. 6 is a cross-section taken on the line VI-VI in Fig. 5,

Fig. 7 shows yet another electrophoretic display device according to the invention, while

Fig. 8 shows how different grey values (intermediate optical states) have been realized in the display device of Fig. 8, and

Fig. 9 shows a variant of Fig. 7.

The Figures are diagrammatic and not drawn to scale; corresponding parts are generally denoted by the same reference numerals.

25

Fig. 1 shows an electric equivalent of a part of a display device 1 to which the invention is applicable. It comprises a matrix of pixels 10 at the area of crossings of row or selection electrodes 7 and column or data electrodes 6. The row electrodes 1 to m are consecutively selected by means of a row driver 4, while the column electrodes 1 to n are provided with data via a data register 5. To this end, incoming data 2 are first processed, if necessary, in a processor 10. Mutual synchronization between the row driver 4 and the data register 5 takes place via drive lines 8.

30

Drive signals from the row driver 4 and the data register 5 select a pixel 10 (referred to as passive drive). In known devices, a column electrode 6 acquires such a voltage

with respect to a row electrode 7 that the pixel assumes one of two extreme states at the area of the crossing (for example, black or colored, dependent on the colors of the liquid and the electrophoretic particles).

If desired, drive signals from the row driver 4 may select the picture electrodes via thin-film transistors (TFTs) 9 whose gate electrodes are electrically connected to the row electrodes 7 and whose source electrodes 21 are electrically connected to the column electrodes 6 (referred to as active drive). The signal at the column electrode 6 is transferred via the TFT to a picture electrode, coupled to the drain electrode, of a pixel 10. The other picture electrodes of the pixel 10 are connected to, for example, ground, for example, by means of one (or more) common counter electrode(s). In the example of Fig. 1, such a TFT 9 is shown diagrammatically for only one pixel 10.

In a display device according to the invention, each pixel is provided with a further electrode and drive means for supplying the further electrode with electric voltages. This is shown in Fig. 2, in which a cross-section of such a pixel provided with a third electrode 6' is shown. The drive means comprise, for example, the data register 5 (and possibly a part of the driver), and extra column electrodes 6' (and an extra TFT in the case of active drive).

A pixel 10 (Fig. 2) comprises a first substrate 11, for example, of glass or a synthetic material, provided with a switching electrode 7, and a second, transparent substrate 12 provided with a switching electrode 6. The pixel is filled with an electrophoretic medium, for example, a white suspension 13 containing, in this example, positively charged, black particles 14. The pixel is further provided with a third electrode 6' (and, if necessary, as described above, with drive means not shown in Fig. 2) so as to realize intermediate optical states via electric voltages across the third electrode. In this respect, it should be noted that the third electrode 6' also influences the switching behavior between the two extreme states. As will be further explained hereinafter, the voltage across this electrode also influences the two extreme states.

For example, in Fig. 2A, the switching electrode 7 is connected to ground, while both electrodes 6, 6' are connected to a voltage +V. The black particles 14 (positively charged in this example) move towards the electrode at the lowest potential, in this case the electrode 7. Viewed from the viewing direction 15, the pixel now has the color of the liquid 13 (which is white in this case). In Fig. 2B, the switching electrode 7 is connected to ground, while both electrodes 6, 6' are connected to a voltage -V. The positively charged, black particles 14 move towards the lowest potential, in this case towards the potential plane

defined by the electrodes 6, 6', parallel to and just alongside the substrate 12. Viewed from the viewing direction 15, the pixel now has the color of the black particles 14.

Also in Fig. 2C, the switching electrode 7 is connected to ground. The electrode 6 is again connected to a voltage  $-V$ . However, similarly as electrode 7, the third electrode 6' is now connected to ground. The positively charged, black particles 14 move towards the lowest potential, in this case an area around electrodes 6. This is even more strongly the case when the third electrode 6' is connected to a voltage  $+V$ , as is shown in Fig. 2D. Viewed from the viewing direction 15, the pixel now has only partly the color of the black particles 14 and partly the color of the white liquid. A grey hue is thereby obtained (dark grey in the case of Fig. 2C and light grey in the case of Fig. 2D). This will be explained with reference to Fig. 3 in which the potential lines are shown for six possible combinations of voltages across the electrodes 6, 6', 7, and arrows 16 diagrammatically show the direction of the electric forces exerted on the particles 14.

Since the particles may not remain positioned on the substrate, for example, due to movement in the liquid, it may be advantageous to provide it with a sticking layer.

Another possibility of limiting the movement of the liquid is the use of microcapsules as described in "Micro-encapsulated Electrophoretic Materials for Electronic Paper Displays", 20<sup>th</sup> IDRC conference, pp. 84-87 (2000). The electrophoretic medium, a liquid 13 containing positively charged particles 14, is now present in microcapsules 17 in a transparent substrate 18 (see Fig. 4).

In Fig. 4A, the switching electrode 7 is again connected to ground (0 V), while the electrodes 6, 6' are again connected to a voltage  $+V$ . The positively charged, black particles 14 move towards the electrode at the lowest potential, in this case the electrode 7, i.e. towards the lowest part of the microcapsule 17. Viewed from the viewing direction 15, the pixel again has the color of the liquid 13. In Fig. 4B, the switching electrode 7 is connected to ground, while both electrodes 6, 6' are connected to a voltage  $-V$ . Viewed from the viewing direction 15, the pixel now has the color of the black particles 14.

Also in Fig. 4C, the switching electrode 7 is connected to ground. The electrode 6 is again connected to a voltage  $-V$ . However, similarly as electrode 7, the third electrode 6' is now connected to ground. The positively charged, black particles 14 move towards the lowest potential, in this case towards electrode 6 and are eventually largely present in the upper part of the microcapsule 17. Viewed from the viewing direction 15, the pixel now has a dark grey color. When the third electrode 6' is connected to a voltage  $+V$ , as

is shown in Fig. 4D, the particles 14 are eventually present along an edge of the microcapsule 17. The pixel now has a light grey color.

In the display device of Fig. 5, the switching electrodes 6, 7 and the third electrode 6' are present on the same substrate 11, while the third electrode is separated from the switching electrodes by means of a layer 18 of a dielectric material. In this example, the switching electrodes 6, 7 are comb-shaped and interdigital, and parts of the third electrode 6' are situated between the teeth of the two switching electrodes. The comb shape is not strictly necessary. A lateral field between the two switching electrodes 6, 7 is also satisfactory. The cross-section shown in Fig. 6 may then depict both a complete pixel and a part of a pixel of the display device of Fig. 5. Illustrated in the same way as in Figs. 2, 3, various electric field configurations can be introduced again, with the attendant different grey values. To prevent mixing of particles 14 belonging to two pixels, walls or barriers 19 may be provided. When a plurality of colors is used, it is often desirable to provide these walls or barriers (either or not across the full height of the pixel).

The electrophoretic medium may also be present in a prismatic structure as described in "New Reflective Display Based on Total Internal Reflection in Prismatic Microstructures", Proc. 20th IDRC conference, pp. 311- 314 (2000). This is shown in Figs. 7, 8. The known device comprises a prismatic structure of (in this example) a repetitive structure of hollow (for example, glass) triangles comprising a liquid 13 which contains positively charged particles. Dependent on the voltages across the electrodes 6, 7, the positively charged particles are present on the (bottom) electrode 7 of metal or on the ITO (top) electrode 6. In the first-mentioned case, an incident beam undergoes total reflection on the glass-liquid interface and is reflected (arrow a). In the second case, an incident beam is absorbed on the glass-liquid interface (arrow b).

By introducing a third electrode 6' again, various electric field configurations with the attendant different grey values may be introduced again, similarly as in the examples of Figs. 2 and 4. When light-absorbing, positively charged particles 14 are used in a liquid 13, the configurations 8A, 8B, 8C and 8D correspond to the colors white, black, dark grey and light grey. By introducing a further electrode 6'', with the electrodes 6', 6'' being supplied with different voltages, intermediate grey values can be realized (see Fig. 8E).

The invention is of course not limited to the examples described above. For example, four possible grey hues are obtained in the examples described above. It will be evident that a plurality of grey hues can be displayed at varying voltages and that a full grey scale can be realized in an analog manner. Several variations are also possible for the shape

of the prismatic structure of Fig. 8, such as roof-shaped, spherical or cylindrical structures, as is shown diagrammatically in a cross-section, by way of example, in Fig. 9. Alternatively, the liquid 13 may be filled with a black ink containing white  $\text{TiO}_2$  particles 14. To prevent crosstalk between pixels, the pixels should be electrically shielded from each other as much as possible. This may be realized by providing walls having a very high dielectric constant, or by conducting walls. The conducting walls may be connected to electrode 7 (ground).

A combination of one or more of said possibilities is alternatively applicable in practice.

The protective scope of the invention is not limited to the embodiments described.

The invention resides in each and every novel characteristic feature and each and every combination of characteristic features. Reference numerals in the claims do not limit their protective scope. Use of the verb "to comprise" and its conjugations does not exclude the presence of elements other than those stated in the claims. Use of the article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.



## CLAIMS:

1. An electrophoretic display device comprising at least one pixel with an electrophoretic medium, and two switching electrodes, as well as drive means via which the pixel can be brought to different optical states, wherein the pixel comprises at least one further electrode and drive means for realizing intermediate optical states via electric  
5 voltages.
2. An electrophoretic display device as claimed in claim 1, wherein the display device comprises means for bringing the pixel to a defined state, prior to selection.
- 10 3. An electrophoretic display device as claimed in claim 1, wherein the electrophoretic medium is present between two substrates each comprising a switching electrode, at least one of the substrates being provided with the further electrode.
4. An electrophoretic display device as claimed in claim 1 or 2, wherein the  
15 electrophoretic medium is present in a microcapsule.
5. An electrophoretic display device as claimed in claim 1 or 3, wherein pixels are mutually separated by a barrier.
- 20 6. An electrophoretic display device as claimed in claim 1, wherein the electrophoretic medium is present between two substrates, one of the substrates comprising the switching electrodes and the further electrode.
7. An electrophoretic display device as claimed in claim 3 or 6, wherein the  
25 switching electrodes are comb-shaped and interdigital.
8. An electrophoretic display device as claimed in claim 3 or 6, wherein the further electrode is separated from the switching electrodes by a layer of dielectric material.

9. An electrophoretic display device as claimed in claim 8, wherein parts of the further electrode are situated between the teeth of the two switching electrodes.
10. An electrophoretic display device as claimed in claim 1, wherein the  
5 electrophoretic medium is present in a prismatic structure.
11. An electrophoretic display device as claimed in claim 10, wherein the prismatic structure is provided proximate to its base with the two switching electrodes, and the further electrode is situated proximate to the top of the prismatic structure.

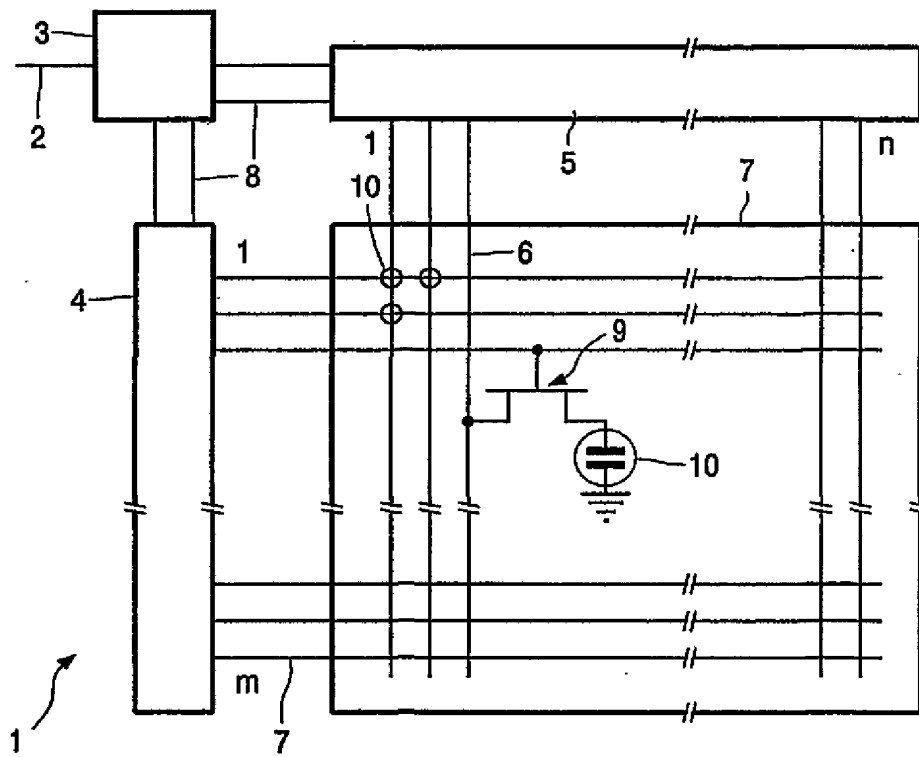


FIG. 1

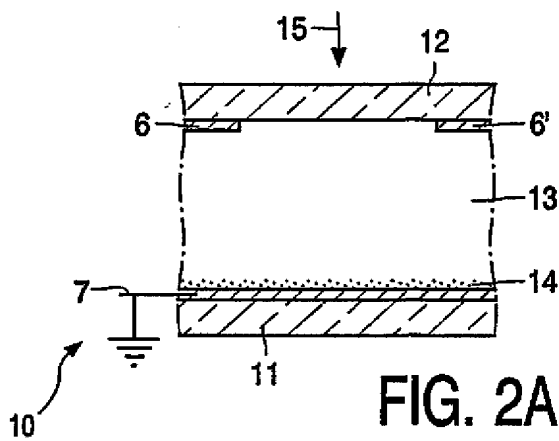


FIG. 2A

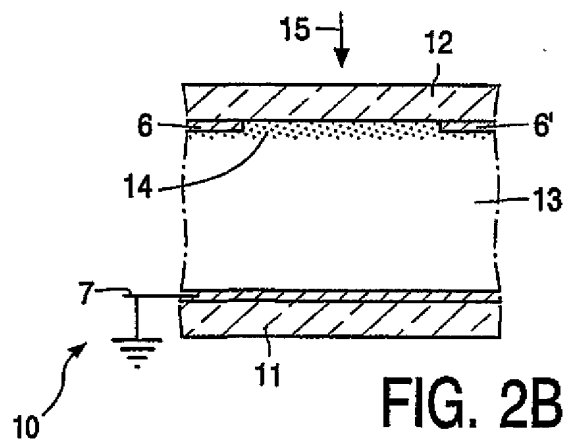


FIG. 2B

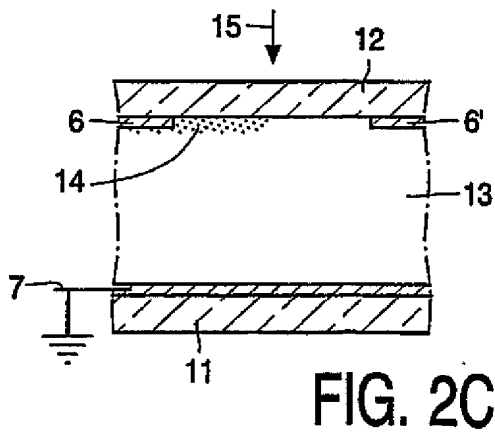


FIG. 2C

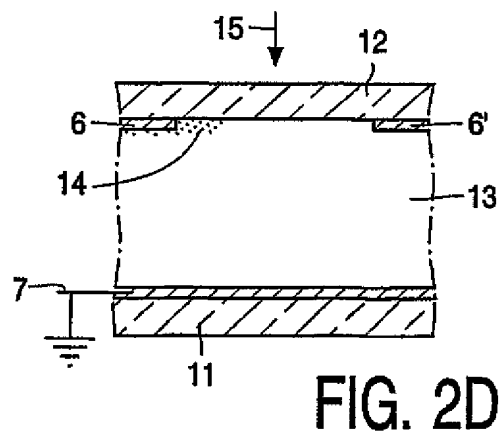
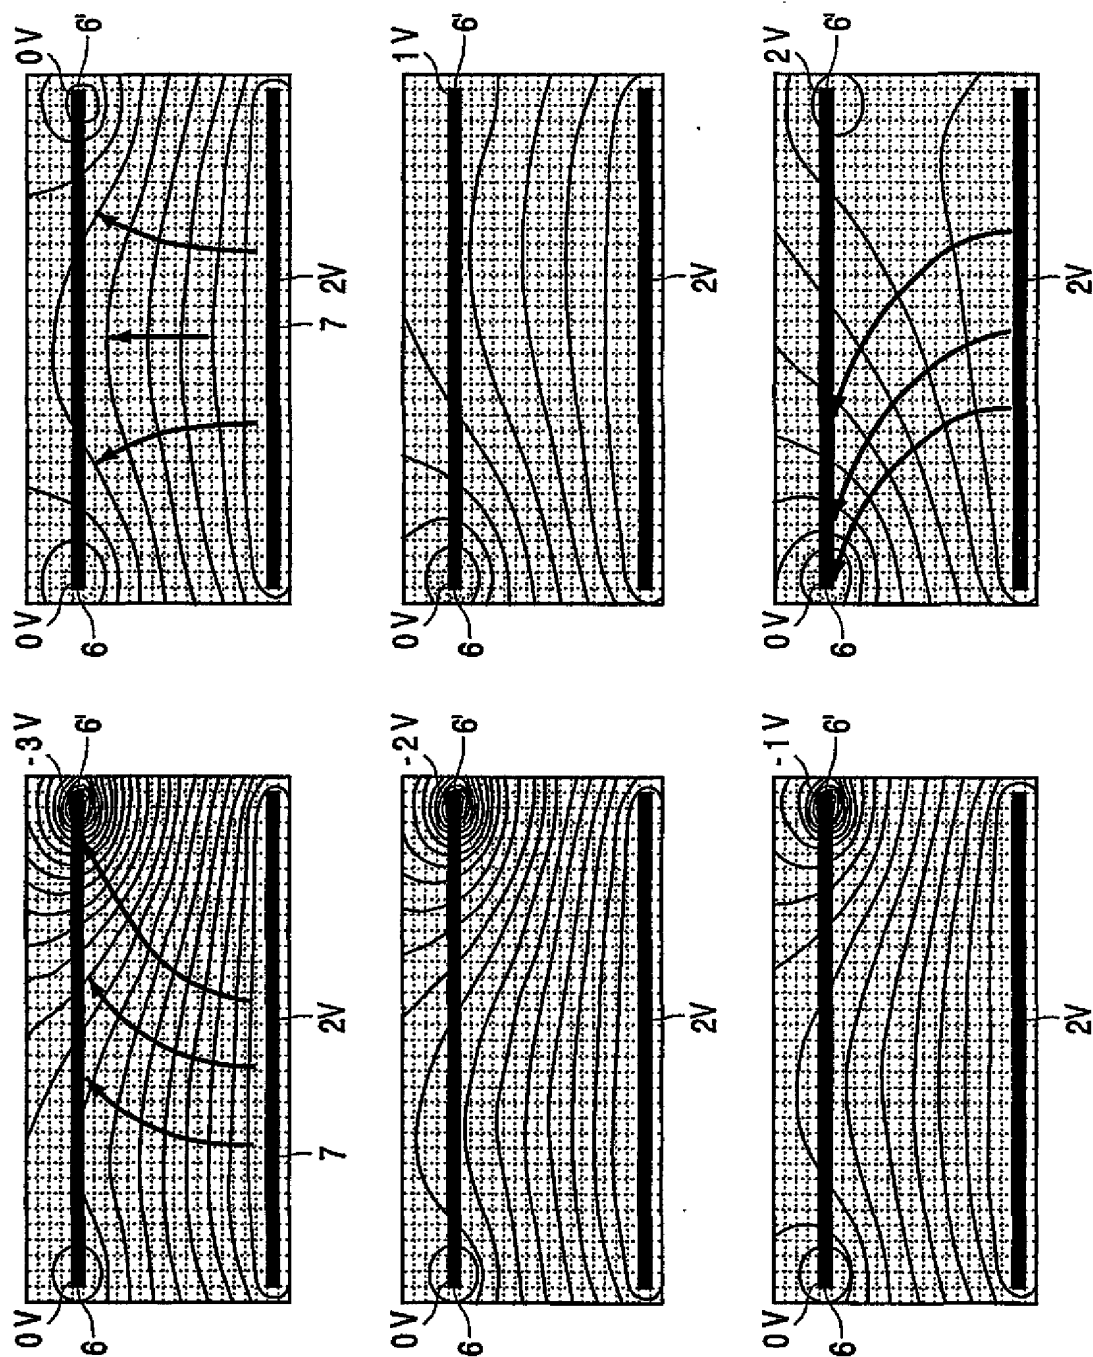


FIG. 2D

FIG. 3



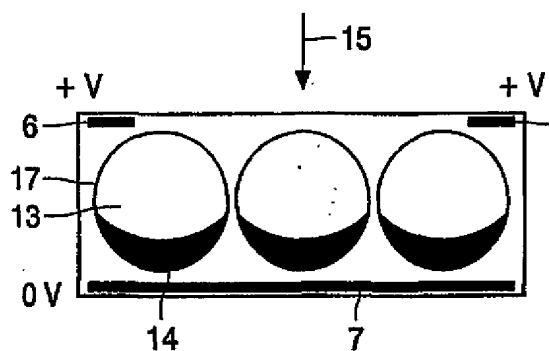


FIG. 4A

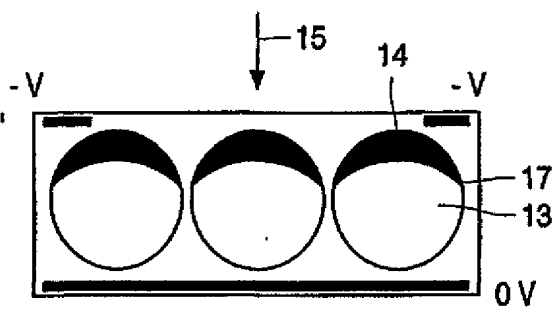


FIG. 4B

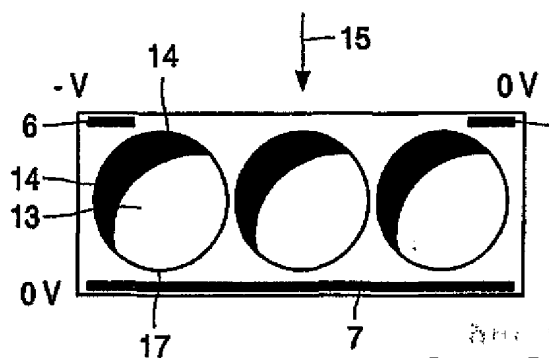


FIG. 4C

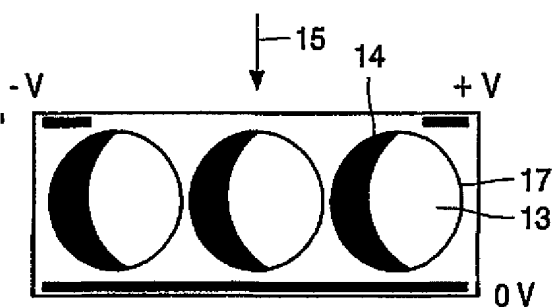


FIG. 4D

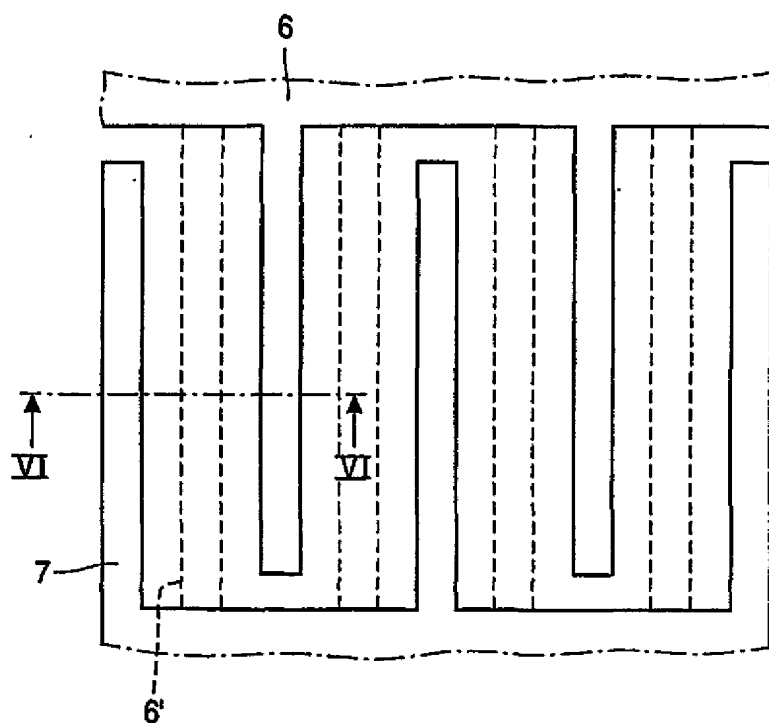


FIG. 5

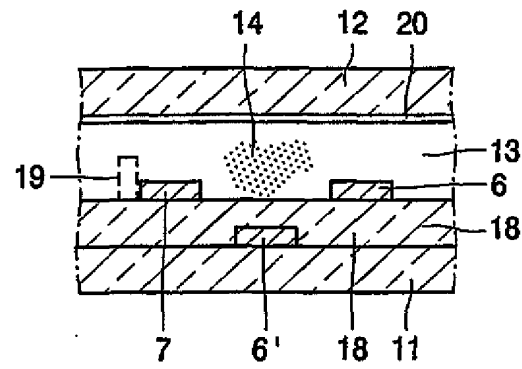


FIG. 6

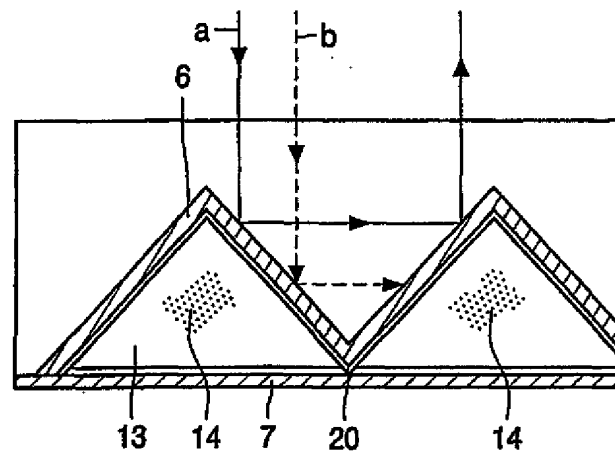


FIG. 7

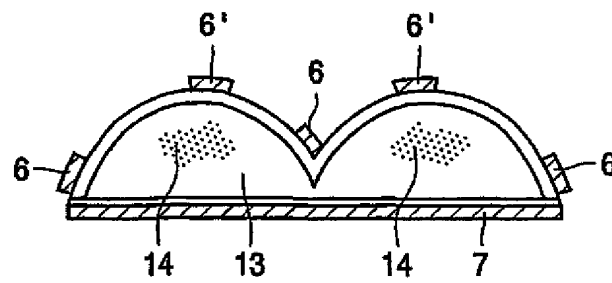


FIG. 9

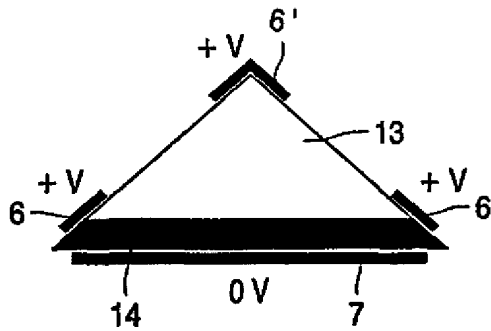


FIG. 8A

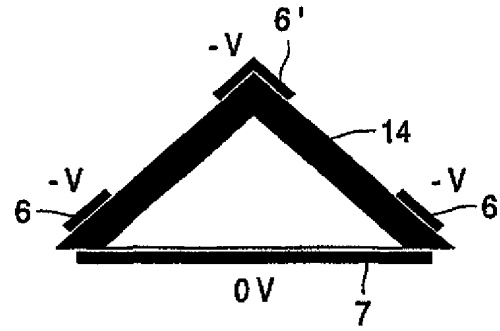


FIG. 8B

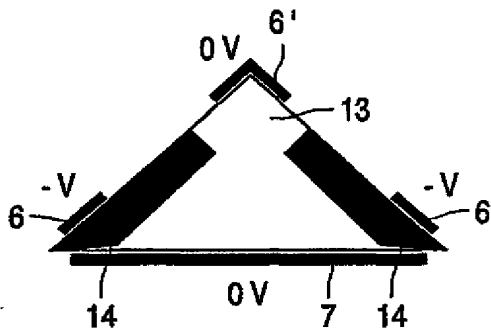


FIG. 8C

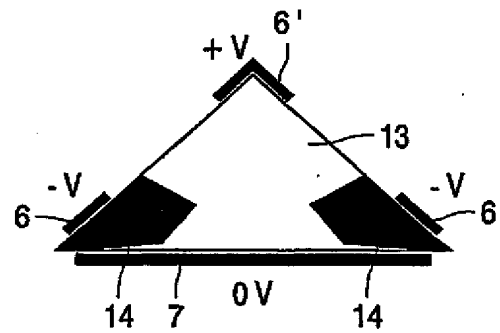


FIG. 8D

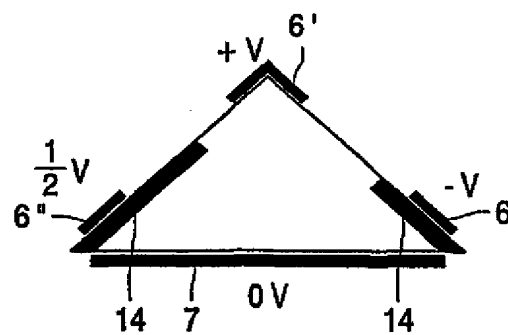


FIG. 8E

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
**WO 02/073304 A3**

(51) International Patent Classification<sup>7</sup>: **G02F 1/167**

(74) Agent: **RAAP, Adriaan, Y.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: **PCT/IB02/00611**

(81) Designated States (*national*): CN, JP, KR.

(22) International Filing Date: 28 February 2002 (28.02.2002)

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(25) Filing Language: English

(26) Publication Language: English

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(30) Priority Data:  
01200952.8 14 March 2001 (14.03.2001) EP


(71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(88) Date of publication of the international search report:  
21 November 2002

(72) Inventors: **JOHNSON, Mark, T.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **DE BOER, Dirk, K., G.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ELECTROPHORETIC DISPLAY DEVICE**

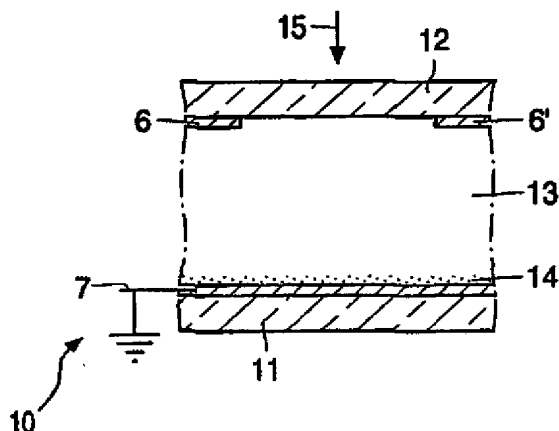

(57) Abstract: In electrophoretic display is disclosed, in which grey values are realized by introducing a further electrode (6') in addition to the conventional electrodes (6, 7) for bistable operation.

WO 02/073304 A3



## INTERNATIONAL SEARCH REPORT

In tional Application No

PCT/IB 02/00611

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02F1/167

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 53373 A (E INK CORP) 21 October 1999 (1999-10-21) figures 3E-3M, 4A, 4B	1-11
A	KISHI, E. ET AL: "Development of In-plane EPD" SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS, May 2000 (2000-05), pages 24-27, XP001086658 cited in the application the whole document	7
A	US 6 172 798 B1 (ALBERT JONATHAN D ET AL) 9 January 2001 (2001-01-09) figure 4C	10

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

4 September 2002

Date of mailing of the international search report

13/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

G111, R

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International Application No  
PCT/IB 02/00611

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9953373	A	21-10-1999	AU 3487599 A	01-11-1999
			CA 2300827 A1	04-03-1999
			CA 2300830 A1	04-03-1999
			CA 2300849 A1	04-03-1999
			CA 2321131 A1	21-10-1999
			EP 1070276 A1	24-01-2001
			JP 2002511607 T	16-04-2002
			WO 9953373 A1	21-10-1999
			US 6262706 B1	17-07-2001
			US 6177921 B1	23-01-2001
			US 6249271 B1	19-06-2001
US 6172798	B1	09-01-2001	US 6130774 A	10-10-2000
			AU 3767899 A	16-11-1999
			CA 2300827 A1	04-03-1999
			CA 2300830 A1	04-03-1999
			CA 2300849 A1	04-03-1999
			CA 2329173 A1	04-11-1999
			EP 1075670 A1	14-02-2001
			JP 2002513169 T	08-05-2002
			US 2002089735 A1	11-07-2002
			WO 9956171 A1	04-11-1999
			US 6252564 B1	26-06-2001
			US 6118426 A	12-09-2000
			US 6262706 B1	17-07-2001
			US 6067185 A	23-05-2000
			US 6300932 B1	09-10-2001
			US 6232950 B1	15-05-2001
			US 6392785 B1	21-05-2002
			US 6249271 B1	19-06-2001
			US 2002018042 A1	14-02-2002

# INTERNATIONAL SEARCH REPORT

national application No.

PCT/IB 02/00611

## Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

An electrophoretic display is disclosed, in which grey values are realized by introducing a further electrode (6') in addition to the conventional electrodes (6, 7) for bistable operation.